


J200/SD680 60HZ PWA CONVERSIONS

240V, 2PUMP (Default Settings)

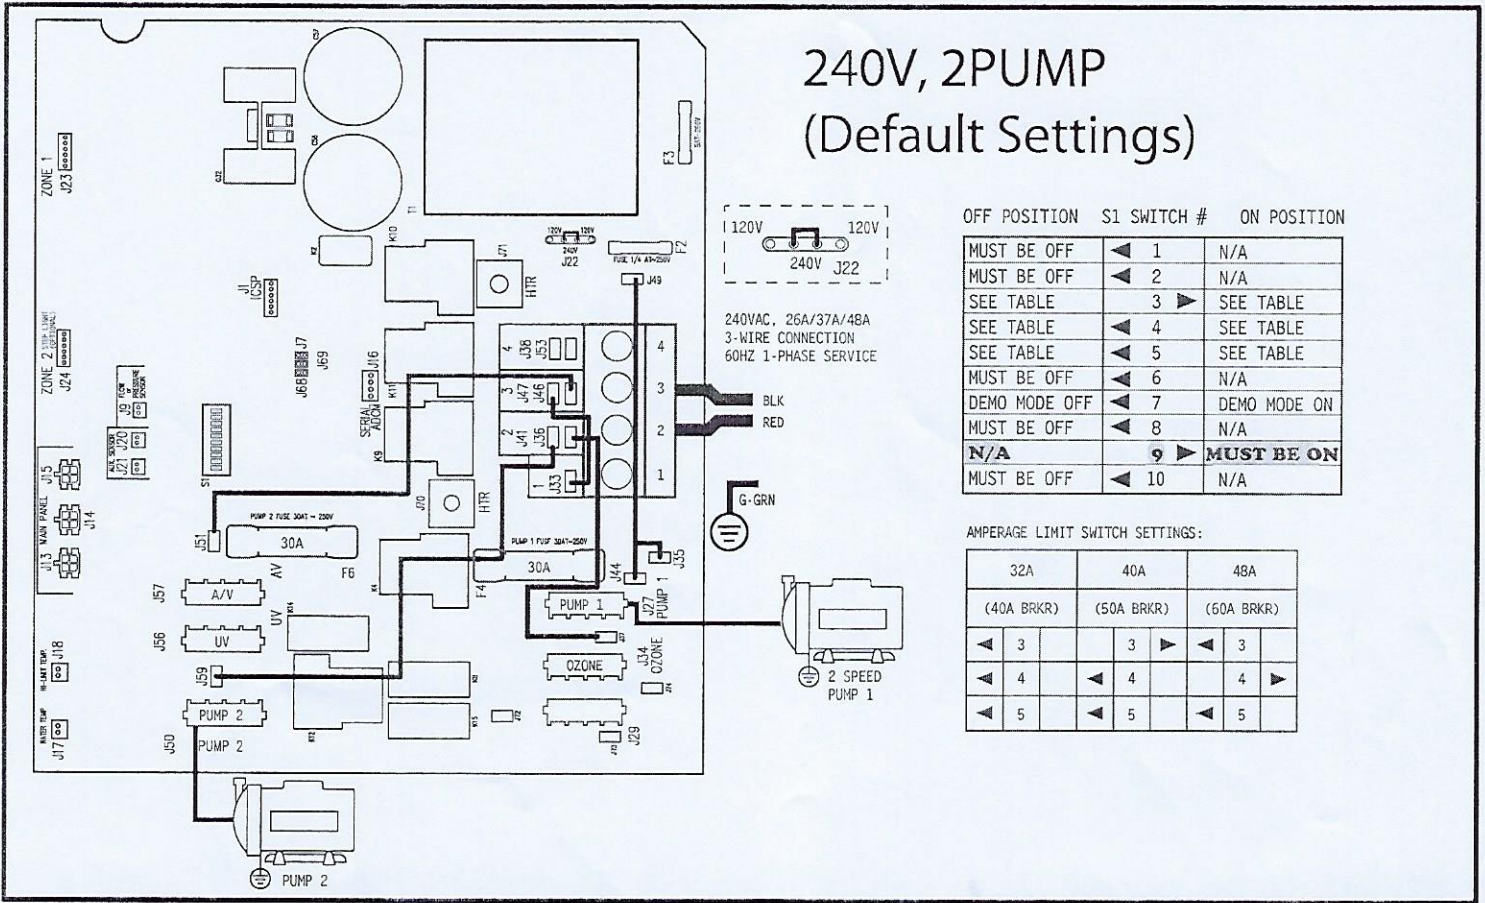


OFF POSITION S1 SWITCH # ON POSITION

MUST BE OFF	◀ 1	N/A
MUST BE OFF	◀ 2	N/A
SEE TABLE	◀ 3 ▶	SEE TABLE
SEE TABLE	◀ 4	SEE TABLE
SEE TABLE	◀ 5	SEE TABLE
MUST BE OFF	◀ 6	N/A
DEMO MODE OFF	◀ 7	DEMO MODE ON
MUST BE OFF	◀ 8	N/A
N/A	◀ 9 ▶	MUST BE ON
MUST BE OFF	◀ 10	N/A

AMPERAGE LIMIT SWITCH SETTINGS:

	32A (40A BRKR)	40A (50A BRKR)	48A (60A BRKR)
◀ 3		3 ▶	◀ 3
◀ 4		4 ▶	◀ 4 ▶
◀ 5		5 ▶	◀ 5 ▶

120V, 1PUMP

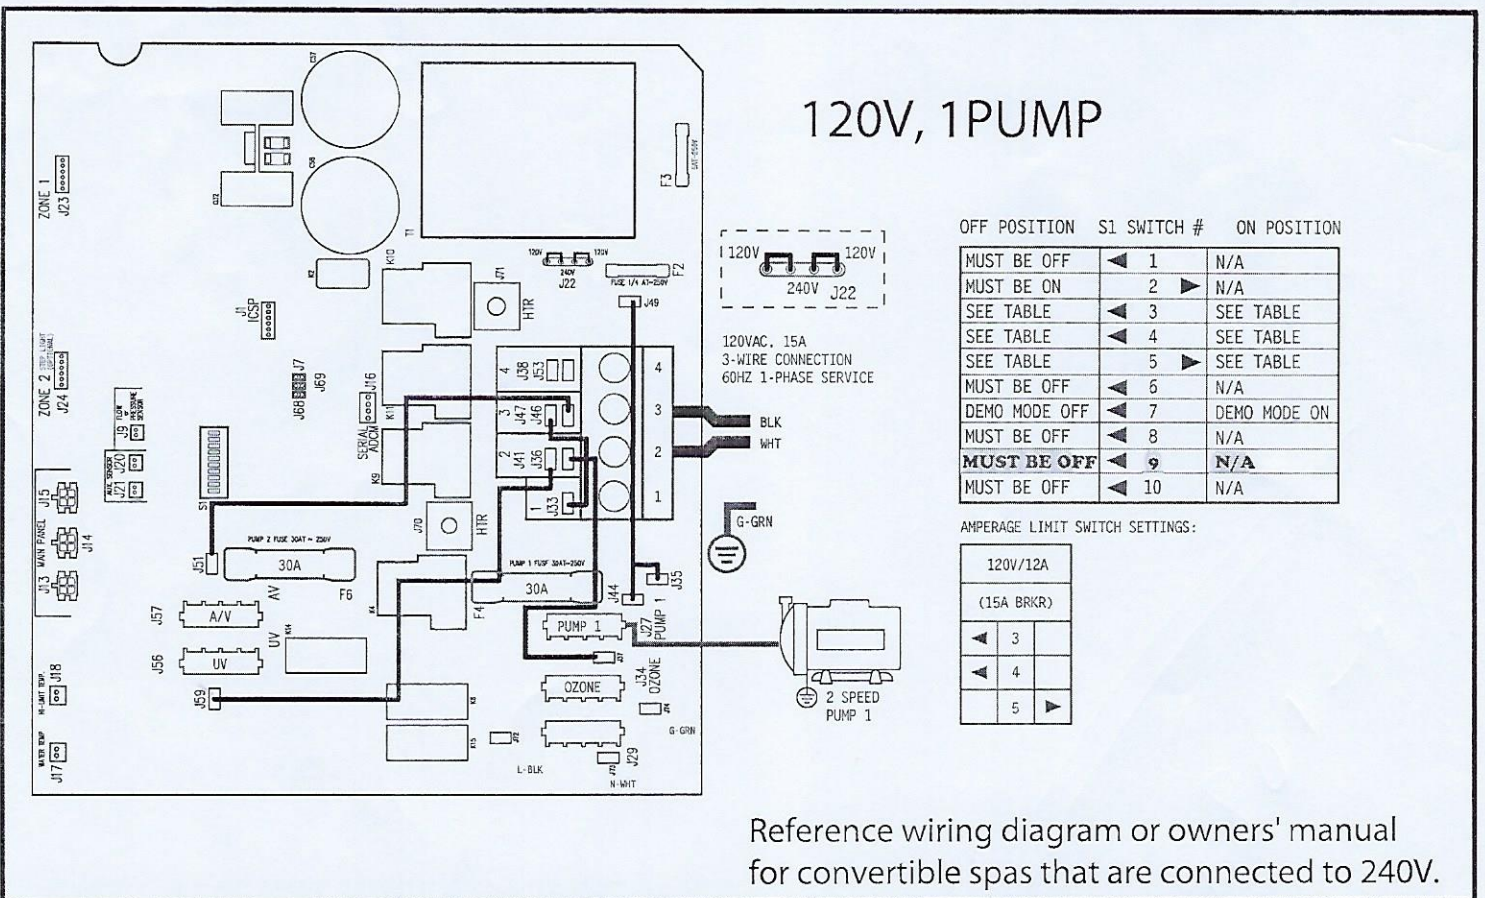

OFF POSITION S1 SWITCH # ON POSITION

MUST BE OFF	◀ 1	N/A
MUST BE ON	◀ 2 ▶	N/A
SEE TABLE	◀ 3	SEE TABLE
SEE TABLE	◀ 4	SEE TABLE
SEE TABLE	◀ 5 ▶	SEE TABLE
MUST BE OFF	◀ 6	N/A
DEMO MODE OFF	◀ 7	DEMO MODE ON
MUST BE OFF	◀ 8	N/A
MUST BE OFF	◀ 9	N/A
MUST BE OFF	◀ 10	N/A

AMPERAGE LIMIT SWITCH SETTINGS:

120V/12A (15A BRKR)		
◀ 3		
◀ 4		
		▶ 5

Reference wiring diagram or owners' manual for convertible spas that are connected to 240V.